

ESP TN/JP, TN/RJ11 and ISDN/RJ45 Series



LPZ $0_B \rightarrow 3$	FULL MODE Bonding + Equipment Protection
SIGNAL/ TELECOM TEST CAT D + C + B	e ENHANCED Low let-through voltage
CURRENT 300mA RATING	LOW INLINE 4.4Ω RESISTANCE

Combined Category D, C, B tested protector (to BS EN 61643-21) suitable to protect telephony equipment plugged into a BT telephone (BS 6312), Modem (RJ11) or ISDN (RJ45) socket. For use at boundaries up to LPZ 0_B to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment.

Features and benefits

- ✓ Very low let-through voltage (enhanced protection to BS EN 62305) between all lines – Full Mode protection
- ✓ Full mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- ✓ Repeated protection in lightning intense environments
- ✓ Supplied in a sturdy ABS housing ready for flat mounting, or vertically via TS35 'Top Hat' DIN rail
- ✓ Substantial earth connection to enable effective earthing
- ✓ ESP TN/JP, ESP TN/RJ11-2/6, ESP TN/RJ11-4/6 and ESP TN/RJ11-6/6 are suitable for telecommunication applications in accordance with Telcordia and ANSI Standards (see Application Note AN005)


Application

- ✓ For PSTN (e.g. POTS, dial-up, lease line, T1/E1, *DSL and Broadband) use ESP TN/JP or TN/RJ11
- ✓ ESP TN/JP and ESP TN/RJ11... are suitable for use on telephone lines with a maximum (or ringing) voltage of up to 296 volts
- ✓ For telephone lines with a British style, jack plug and socket connection, use ESP TN/JP
- ✓ For telephone lines with RJ11 connections protect the middle 2 (of 6) conductors with ESP TN/RJ11-2/6, the middle 4 (of 6) with ESP TN/RJ11-4/6 or all 6 with ESP TN/RJ11-6/6
- ✓ For S/T interface ISDN lines, use ESP ISDN/RJ45-4/8 and ESP ISDN/RJ45-8/8
- ✓ For S/T interface ISDN lines with RJ45 connections protect the middle 4 (of 8) conductors (paired 3&6, 4&5) with ESP ISDN/RJ45-4/8, or all 8 (outside pairs 1&2, 7&8) with ESP ISDN/RJ45-8/8




For further information on RJ45 ISDN applications, see separate Application Note AN002 and for global telephony applications, see separate Application Note AN005 (contact Furse for a copy).

Installation

Connect in series with the telephone or ISDN line. These units are usually installed close to the equipment being protected and within a short distance of a good electrical earth.

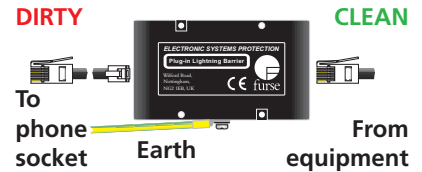

Plug-in series connection for ESP TN/JP (above) and ESP TN/RJ11-2/6, 4/6 & 6/6 (below) and ESP ISDN/RJ45-4/8 & 8/8 (bottom)

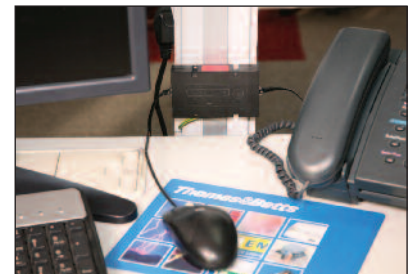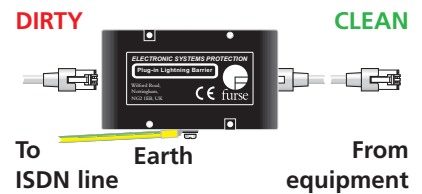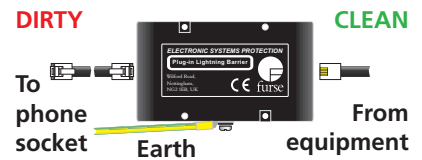

An ESP TN/RJ11-4/6 protecting an external fax line. Note the short earth connection made to the local ring main

Accessories

ESP CAT5e/UTP-1

1 metre cable with RJ45 connections

For non-ISDN wire-in applications the high performance ESP TN or ready-boxed derivative ESP TN/BX or ESP TN/2BX can be used. Protect PBX telephone exchanges and other equipment with LSA-PLUS connections.

Electrical specification

	ESP TN/JP	ESP TN/ RJ11-2/6	ESP TN/ RJ11-4/6	ESP TN/ RJ11-6/6	ESP ISDN/ RJ45-4/8	ESP ISDN/ RJ45-8/8
Nominal voltage	296V	296V	296V	296V	5V	5V/58V ²
Maximum working voltage U_c¹	296V	296V	296V	296V	58V	58V
Current rating (signal)	300mA					
In-line resistance (per line $\pm 10\%$)	4.4 Ω					
Bandwidth (-3dB 50 Ω system)	20MHz	20MHz	20MHz	20MHz	19MHz	19MHz

¹ Maximum working voltage (DC or AC peak) measured at <10 μ A leakage for ESP TN/JP and ESP TN/RJ11 products and 5 μ A for ESP ISDN/RJ45 products.

² Maximum working voltage is 5V for pairs 3/6 & 4/5, and 58V for pairs 1/2 & 7/8.

Transient specification

	ESP TN/JP	ESP TN/ RJ11-2/6	ESP TN/ RJ11-4/6	ESP TN/ RJ11-6/6	ESP ISDN/ RJ45-4/8	ESP ISDN/ RJ45-8/8
Let-through voltage (all conductors) ¹ U_p						
C2 test 4kV 1.2/50 μ s, 2kA 8/20 μ s to BS EN/EN/IEC 61643-21						
- line to line	395V	395V	395V	395V	28V	28V/88V ³
- line to earth	395V	395V	395V	395V	88V	88V
C1 test 1kV, 1.2/50 μ s, 0.5kA 8/20 μ s to BS EN/EN/IEC 61643-21						
- line to line	390V	390V	390V	390V	23V	23V/63V ³
- line to earth	390V	390V	390V	390V	63V	63V
B2 test 4kV 10/700 μ s to BS EN/EN/IEC 61643-21						
- line to line	298V	298V	298V	298V	26V	26V/65V ³
- line to earth	298V	298V	298V	298V	65V	65V
5kV, 10/700 μ s ²						
- line to line	300V	300V	300V	300V	27V	27V/80V ³
- line to earth	300V	300V	300V	300V	80V	80V
Maximum surge current ⁴						
D1 test 10/350 μ s to BS EN/EN/IEC 61643-21	1kA					
8/20 μ s to ITU (formerly CCITT), BS 6651:1999 Appendix C	10kA					

¹ The maximum transient voltage let-through the protector throughout the test ($\pm 10\%$), line to line & line to earth, both polarities. Response time <10ns.

² Test to BS 6651:1999 Appendix C, Cat C-High, IEC 61000-4-5:1995, ITU-T (formerly CCITT) K.20, K.21 and K.45, Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68).


³ The first let-through voltage value is for pairs 3/4 & 5/6, and the second value is for pairs 1/2 & 7/8.

⁴ The installation and connectors external to the protector may limit the capability of the protector.

Mechanical specification

	ESP TN/JP	ESP TN/ RJ11-2/6	ESP TN/ RJ11-4/6	ESP TN/ RJ11-6/6	ESP ISDN/ RJ45-4/8	ESP ISDN/ RJ45-8/8
Temperature range	-25 to +70°C					
Connection type	Standard BT jack plug and socket (to BS 6312)	RJ11 plug and socket	RJ11 plug and socket	RJ11 plug and socket	RJ45 plug and socket	RJ45 plug and socket
Earth connection	M4/DIN rail					
Case material	ABS UL94 V-0					
Weight – unit	0.15kg					
– packaged	0.2kg					

Dimensions




ESP TN/JP cable length = 1 metre



ESP ISDN/RJ45-4/8, -8/8 cable length = 0.25 metre



ESP TN/RJ11-2/6, 4/6, 6/6 cable length = 1 metre



Fixing centres 49mm x 54mm
M3 clearance