

Medium wall heat shrink tube with adhesive, shrink ratio 3:1 - 4 : 1

For electrical insulation, sealing and mechanical reinforcement of cables and tubes up to 1kV.

- ❖ Suitable for cable joints and cable terminations
- ❖ Polyolefine crosslinked
- ❖ Fast recovery

- continuous temperature range from - 55°C till +90°C
- excellent resistance against UV, chemicals
- corrosion resistant
- dielectric strength: ≥ 15 kV/mm (ASTM D 2671-98)
- volume resistivity: $>1 \times 10^{12}$ ohm cm (ASTM D 257-98)
- heatshock (30 min. / 200 °C): no damage (ASTM D 2671-98)
- tensile strength: ≥ 12 Mpa (ASTM D 2671-98)
- elongation at break: $\geq 400\%$ (ASTM D 2671-98)
- longitudinal change: ≤ 15 (ASTM D 2671-98)
- water absorption: $\leq 0,5\%$ (ASTM D 570)
- flexible
- cadmium free, halogen free
- colour: black


Product cross references:

Raychem: MWTM

DSG Canusa: CFW / CFTV

Art.nr.	D Ø D* mm	W* mm	Type
503610	9 - 3	1,6	9/3 -1200
503630	16 - 5	2,0	16/5 -1200
503635	19 - 6	2,0	19/6 - 1200
503650	28 - 6	2,3	28/6 -1200
503660	33 - 9	2,4	33/9 -1200
503670	40 - 12	2,4	40/12 -1200
503680	55 - 16	2,6	55/16 -1200
503690	65 - 19	2,6	65/19 -1200
503700	75 - 22	2,7	75/22 -1200
503720	100 - 25	3,2	100/25 -1200
503730	115 - 34	3,2	115/34 -1200
503740	140 - 42	3,4	140/42 - 1200

* after free recovery

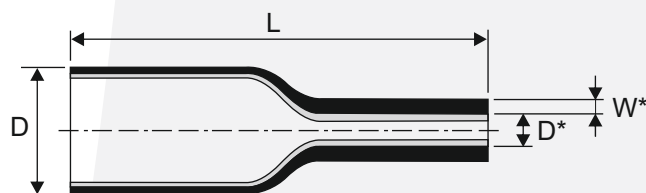

Subject to change without notice