


Straight 6	Straight 95	Straight 300
Straight 16	Straight 120	
Straight 35/70	Straight 185	

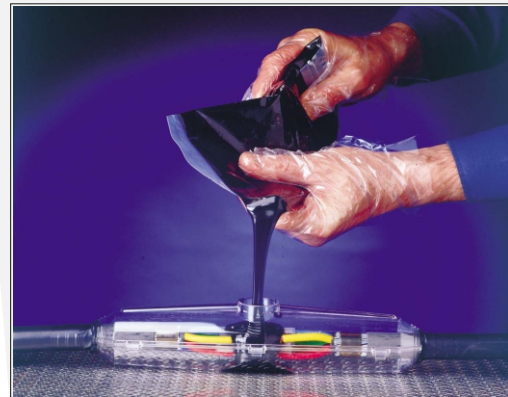

Joints & Dimensions

Joint Type	Length	Diameter	Cable entry (mm)	Resin Contact
Straight 6	189	40	6 - 28mm	200 ml
Straight 16	275	50	12 - 32mm	450ml
Straight 35/70	355	72	26 - 53mm	1.1 Litre
Straight 95	435	86	28 - 58mm	1.7 Litres
Straight 120	547	108	37 - 67mm	3.3 Litres
Straight 185	800	132	48 - 88mm	8.45 Litres
Straight 300	800	132	48 - 88mm	7.5 Litres

Selection Chart

Main Cable Size mm ²	No. of Cores	Straight	Branch
1.5	2	Straight 6	MB6
	3	Straight 6	MB6
	4	Straight 6	MB6
2.5	2	Straight 6	MB6
	3	Straight 6	MB6
	4	Straight 6	MB6
4	2	Straight 6	MB6
	3	Straight 6	MB6
	4	Straight 6	MB6
6	2	Straight 6	MB6
	3	Straight 6	MB6
	4	Straight 6	MB6
10	2	Straight 6	MB6
	3	Straight 16	MB16
	4	Straight 16	MB16
16	2	Straight 6	MB16
	3	Straight 16	MB16
	4	Straight 16	MB16
25	2	Straight 16	MB35
	3	Straight 35/70	MB35
	4	Straight 35/70	MB35
35	2	Straight 35/70	MB35
	3	Straight 35/70	MB35
	4	Straight 35/70	MB35

Application:

- Low Voltage 1kV (1000v), Telecommunication and Signalisation
- Underground, above ground, under water

Features:

- Easy to assemble
- Easy-Mix twin pack resin for added safety
- Sufficient resin provided - no need to top up
- Long shelf life
- Strong transparent shells - Snap together - no resin leakage
- Designed for UK armoured cables to afford plenty of room to work
- Can be customised to suit individual Requirements
- Available with- or without mechanical connectors/ earth kit
- Certified to BS-EN 50393:2006

Subject to change without notice

Version June 2011

Cable joints and accessories • Sealing systems • Customer specific solutions

Cast Resin Joints

Cable accessories